

DESCRIPTION

Insulated ceiling AirTite housing for 5" Accurus square trim fixtures. For 12V MR16 71 watts max.

For insulated ceiling applications. Rated for direct contact with insulation material.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A...Housing

Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable plaster frame can accommodate up to 1" ceiling thickness.

B...System Protection:

Thermal protection provided.

C...Electrical

Integral j-box and electronic or magnetic low voltage transformer. 120V or 277V input, 12V output. Junction box is U.L. listed for through branch wiring. Includes five 1/2 trade size knockouts (six knockouts when magnetic xfmr. is specified)



D...Lamp

12V MR16 50 watts max. (not included) Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.

E...Mounting

Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively.

Ceiling Cut-Out: 4.50" sq.

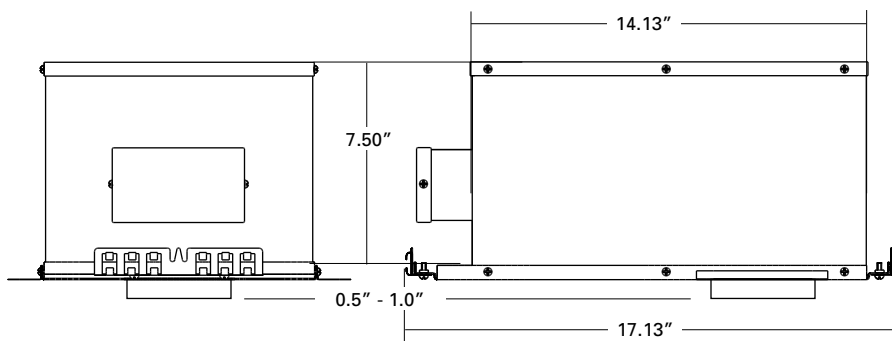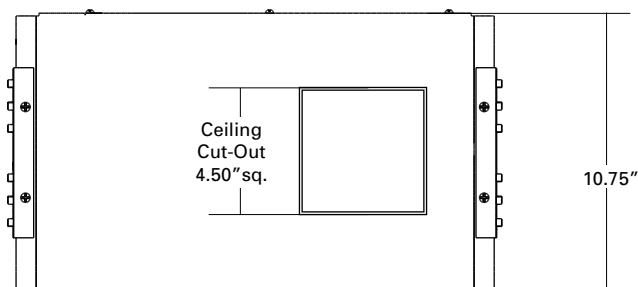

ACCURUS HOUSING

ACT953IC Insulated Ceiling AirTite Housing for Square Trim

FOR 12V MR16 50 watts max.



ORDERING INFORMATION

ACT953IC		
Housing ACT953IC = Accurus Insulated Ceiling AirTite Housing for Square Trim w/Integral Transformer	Transformer ELC = Electronic MAG = Magnetic	Voltage 120 = 120 volts primary 277 = 277 volts primary